

















HEAT SINK

Apperance	Size	Suitable Specification	Apperance	Size	Suitable Specification																																				
KH050 	尺寸: 60mm X 50mm 	<table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH050-50</td> <td>50</td> <td>5A, 10A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH050-50	50	5A, 10A	KH090 NEW 	尺寸: 85mm X 85mm 	KH090 Series FOR SIGNAL SSR & 3 PHASE SSR <table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH090-100</td> <td>100</td> <td>25A-75A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH090-100	100	25A-75A																								
Model No	Length L(mm)	Suitable SSR																																							
KH050-50	50	5A, 10A																																							
Model No	Length L(mm)	Suitable SSR																																							
KH090-100	100	25A-75A																																							
KH060 	尺寸: 60mm X 50mm 	<table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH060-50</td> <td>50</td> <td>10A, 15A</td> </tr> <tr> <td>KH060-80</td> <td>80</td> <td>25A</td> </tr> <tr> <td>KH060-100</td> <td>100</td> <td>40A</td> </tr> <tr> <td>KH060-120</td> <td>120</td> <td>50A</td> </tr> <tr> <td>KH060-150</td> <td>150</td> <td>75A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH060-50	50	10A, 15A	KH060-80	80	25A	KH060-100	100	40A	KH060-120	120	50A	KH060-150	150	75A	KH104 	尺寸: 81mm X 81mm 	KH104 Series FOR 3PHASE SSR <table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH104-104</td> <td>104</td> <td>25A, 40A</td> </tr> <tr> <td>KH104-120</td> <td>120</td> <td>50A, 75A</td> </tr> <tr> <td>KH104-150</td> <td>150</td> <td>90A, 100A</td> </tr> <tr> <td>KH104-200</td> <td>200</td> <td>125A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH104-104	104	25A, 40A	KH104-120	120	50A, 75A	KH104-150	150	90A, 100A	KH104-200	200	125A			
Model No	Length L(mm)	Suitable SSR																																							
KH060-50	50	10A, 15A																																							
KH060-80	80	25A																																							
KH060-100	100	40A																																							
KH060-120	120	50A																																							
KH060-150	150	75A																																							
Model No	Length L(mm)	Suitable SSR																																							
KH104-104	104	25A, 40A																																							
KH104-120	120	50A, 75A																																							
KH104-150	150	90A, 100A																																							
KH104-200	200	125A																																							
KH080 	尺寸: 70mm X 70mm 	<table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH080-50</td> <td>50</td> <td>25A</td> </tr> <tr> <td>KH080-100</td> <td>100</td> <td>40A</td> </tr> <tr> <td>KH080-150</td> <td>150</td> <td>50A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH080-50	50	25A	KH080-100	100	40A	KH080-150	150	50A	KH197 	尺寸: 130mm X 81.5mm 	KH197 Series FOR 3PHASE SSR <table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH197-100</td> <td>100</td> <td>25A, 40A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH197-100	100	25A, 40A																		
Model No	Length L(mm)	Suitable SSR																																							
KH080-50	50	25A																																							
KH080-100	100	40A																																							
KH080-150	150	50A																																							
Model No	Length L(mm)	Suitable SSR																																							
KH197-100	100	25A, 40A																																							
KH100 	尺寸: 81mm X 81mm 	<table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH100-45</td> <td>45</td> <td>40A</td> </tr> <tr> <td>KH100-70</td> <td>70</td> <td>50A</td> </tr> <tr> <td>KH100-100</td> <td>100</td> <td>75A</td> </tr> <tr> <td>KH100-120</td> <td>120</td> <td>90A</td> </tr> <tr> <td>KH100-150</td> <td>150</td> <td>100A</td> </tr> <tr> <td>KH100-200</td> <td>200</td> <td>125A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH100-45	45	40A	KH100-70	70	50A	KH100-100	100	75A	KH100-120	120	90A	KH100-150	150	100A	KH100-200	200	125A	KH120 	尺寸: 104mm X 80mm 	KH120 Series FOR 3PHASE SSR <table border="1"> <thead> <tr> <th>Model No</th> <th>Length L(mm)</th> <th>Suitable SSR</th> </tr> </thead> <tbody> <tr> <td>KH120-80</td> <td>80</td> <td>25A, 40A</td> </tr> <tr> <td>KH120-100</td> <td>100</td> <td>50A, 75A</td> </tr> <tr> <td>KH120-120</td> <td>120</td> <td>90A, 100A</td> </tr> <tr> <td>KH120-150</td> <td>150</td> <td>125A</td> </tr> </tbody> </table>	Model No	Length L(mm)	Suitable SSR	KH120-80	80	25A, 40A	KH120-100	100	50A, 75A	KH120-120	120	90A, 100A	KH120-150	150	125A
Model No	Length L(mm)	Suitable SSR																																							
KH100-45	45	40A																																							
KH100-70	70	50A																																							
KH100-100	100	75A																																							
KH100-120	120	90A																																							
KH100-150	150	100A																																							
KH100-200	200	125A																																							
Model No	Length L(mm)	Suitable SSR																																							
KH120-80	80	25A, 40A																																							
KH120-100	100	50A, 75A																																							
KH120-120	120	90A, 100A																																							
KH120-150	150	125A																																							

Note: The good environment that this product needs to be used for dispersion the heat, there are special-purpose HEAT SINK in our company, quality is excellent, for the customer to select for use.

Assembly



Accessories




KYOTTO[®]

SOLID STATE RELAY



For The Application To Industrial Automation

- HIGH RELIABILITY
- LONG LIFE
- SAFETY
- NO NOISE
- NO CONTACT POINTS
- NO SWITCHING SPARKS
- NO MECHANICAL DAMAGE
- NEED NO MAINTENANCE
- NEED NO MECHANICAL MOTION, ELECTRONIC DEVICES
- FAST REACTION, FITS IN HIGH FREQUENCY MOTIONS
- LOW INPUT POWER CONSUMPTION

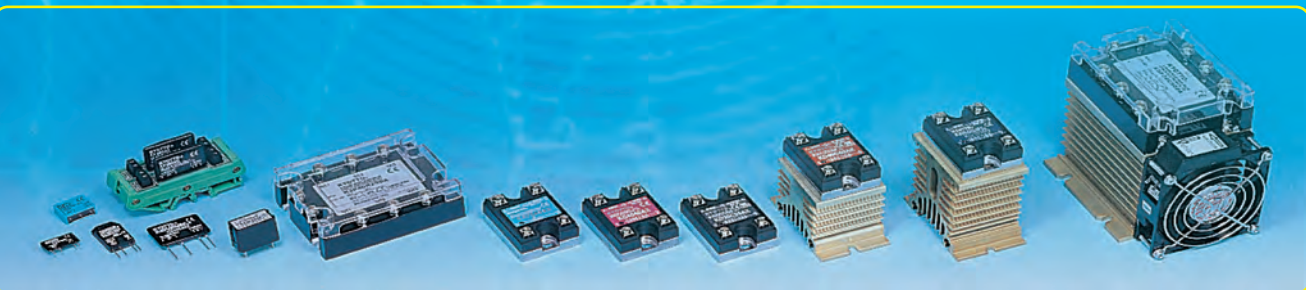


KYOTTO[®]

SOLID STATE RELAY

KYTECH ELECTRONICS, LTD.

AUTHORIZED DISTRIBUTOR:

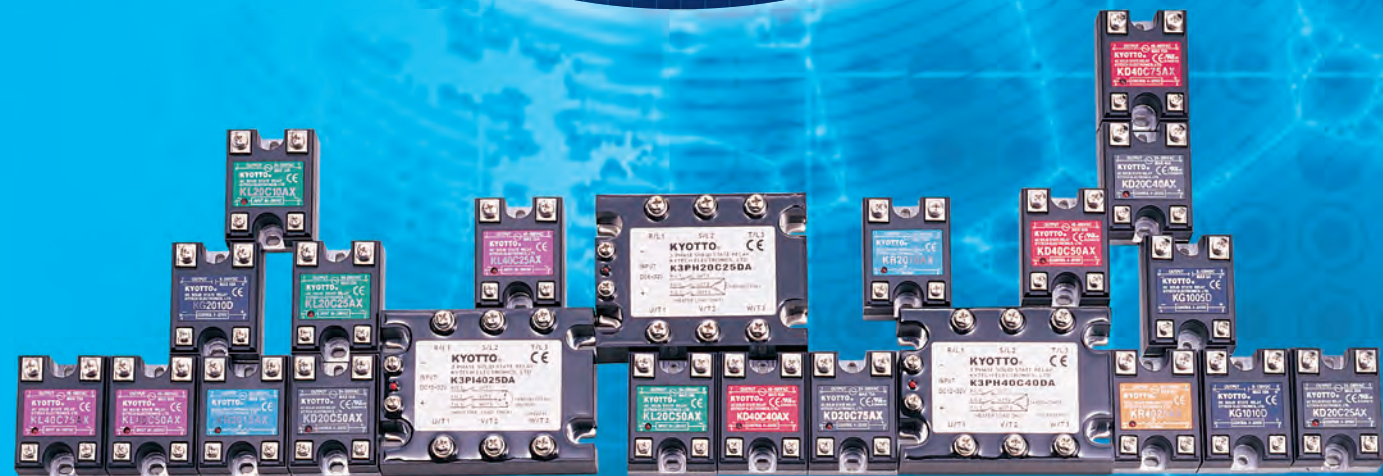

APPEARANCE	DC→AC	DC→AC	CURRENT→ACV	CURRENT→ACV	DC→AC	DC→AC					
MODEL NO. SERIES	KA20C02A KA20C04A	KB20C02A KB20C03A KB20C04A KB20C05A KB20C06A	KB40C02A KB40C03A KB40C04A KB40C05A KB40C06A	KC2010AX KC2015AX KC2025AX KC2040AX	KC2050AX KC2075AX KC4025AX KC2090AX	KC4010AX KC4015AX KC4075AX KC4040AX	KC4050AX KC4075AX KC4025AX KC4090AX	KD20C10AX KD20C15AX KD20C25AX KD20C40AX	KD20C50AX KD20C75AX KD20C90AX KD20C100AX KD20C125AX	KD40C10AX KD40C15AX KD40C25AX KD40C40AX	KD40C50AX KD40C75AX KD40C90AX KD40C100AX KD40C125AX
CONTROL VOLTAGE	3-32VDC	3-32VDC	3-32VDC	4-20mA or 0-10VDC	4-20mA or 0-10VDC	4-32VDC	4-32VDC	4-32VDC	4-32VDC	4-32VDC	4-32VDC
MUST TURN OFF VOLTAGE	1VDC	1VDC	1VDC	2mA or 1VDC	2mA or 1VDC	1VDC	1VDC	1VDC	1VDC	1VDC	1VDC
MAX LOAD CURRENT (25°C)	2A,4A	2A,3A,4A,5A,6A	2A,3A,4A,5A,6A	10A,15A,25A,40A,50A,75A,90A	10A,15A,25A,40A,50A,75A,90A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A
LOAD VOLTAGE	24-280VAC	24-280VAC	24-480VAC	180-280VAC	380-480VAC	24-280VAC	48-480VAC	24-280VAC	48-480VAC	24-280VAC	48-480VAC
BLOCKING VOLTAGE	600V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}
SWITCHING TYPE	ZERO CROSS	ZERO CROSS	ZERO CROSS	Phase Control	Phase Control	ZERO CROSS	ZERO CROSS	ZERO CROSS	ZERO CROSS	ZERO CROSS	ZERO CROSS

SOLID STATE VARIABLE RELAY				MINI TYPE			I/O Module X=1,2,4,8 port		DC→AC	DC→AC	DC→DC
VR500KΩ	VR1MΩ	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC	3-32VDC
10A,15A,25A,40A,50A,75A,90A	2A	2A,3A,4A,5A,6A	2A,4A	8A,12A,16A	8A,12A,16A	8A	10A,15A,25A,40A,50A,75A,90A	2A	2A,3A,4A,5A,6A	2A,4A	8A,12A,16A
24-280VAC	48-480VAC	24-280VAC	48-480VAC	3-60VDC	24-280VAC	3-60VDC	24-280VAC	48-480VAC	24-280VAC	3-60VDC	24-280VAC
600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	1200V _{PEAK}	80VDC	600V _{PEAK}	80VDC	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	80VDC	600V _{PEAK}
Phase Control	ZERO CROSS	TR or MOS FET	ZERO CROSS	TR or MOS FET	ZERO CROSS	TR or MOS FET	ZERO CROSS	TR or MOS FET	ZERO CROSS	Random Switching	TR or MOS FET


DC→DC	DC→DC	DC→DC	AC→AC	AC→AC	AC→AC	AC→DC	AC→DC	AC→DC	AC→DC			
KE0602D KE0604D	KE2002D KE2004D	KF0602D KF1002D	KG1005D KG1010D KG1025D KG1040D KG1050D KG1075D	KG2010D KG2025D KG2040D KG2050D KG2075D	KL20C10AX KL20C15AX KL20C25AX KL20C40AX	KL20C50AX KL20C75AX KL20C90AX KL20C100AX KL20C125AX	KL40C10AX KL40C15AX KL40C25AX KL40C40AX	KL40C50AX KL40C75AX KL40C90AX KL40C100AX KL40C125AX	KM20C02A KM20C04A KM20C06A	KN0602D KN0604D	KN1010D KN1025D KN1040D	KN2010D KN2025D KN2040D
3-32VDC	3-32VDC	3-32VDC	4-32VDC	4-32VDC	80-280VAC	80-280VAC	80-280VAC	80-280VAC	80-280VAC	80-280VAC	80-280VAC	80-280VAC
1VDC	1VDC	1VDC	1VDC	1VDC	10VAC	10VAC	10VAC	10VAC	10VAC	10VAC	10VAC	10VAC
2A,4A	2A,4A	2A,4A	5A,10A,25A,40A,50A,75A	5A,10A,25A,40A,50A,75A	10A,15A,25A,40A,50A,75A,90A,100A,125A	10A,15A,25A,40A,50A,75A,90A,100A,125A	2A,4A,6A	2A,4A	10A,25A,40A	10A,25A,40A	10A,25A,40A	10A,25A,40A
3-60VDC	5-200VDC	3-60VDC	3-120VDC	5-120VDC	5-240VDC	24-280VAC	48-480VAC	24-280VAC	3-60VDC	5-120VDC	5-240VDC	5-240VDC
80VDC	300VDC	80VDC	300VDC	140VDC	300VDC	600V _{PEAK}	1200V _{PEAK}	600V _{PEAK}	80VDC	140VDC	300VDC	300VDC
TR or MOS FET	TR or MOS FET	TR or MOS FET	TR or MOS FET	TR or MOS FET	ZERO CROSS	ZERO CROSS	ZERO CROSS	ZERO CROSS	TR or MOS FET	TR or MOS FET	TR or MOS FET	TR or MOS FET

3 PHASE SOLID STATE RELAY								3 PHASE SOLID STATE REVERSING RELAY	
K3P_C_DA/AA: ZERO CROSS								K3P_R_DA/AA: Random Switching	
K3P20C25DA	K3P40C25DA	K3P20C25AA	K3P40C25AA	K3P20C25DA-2L	K3P40C25DA-2L	K3P20C25DA-2L	K3P40C25DA-2L	K2R480C1DA	K2R480C1AA
6-32VDC	12-32VDC	80-280VAC	80-280VAC	5-32VDC	10-32VDC	80-280VAC	80-280VAC	10~50VDC	80~280VAC
3.0VDC	3.0VDC	10 VAC	10 VAC	3.0VDC	3.0VDC	10 VAC	10 VAC	2.0VDC	10 VAC
25A, 40A, 50A, 75A, 90A, 100A, 125A								1HP (0.75kW)	4HP (3.0 kW)
24-280VAC								2HP (1.5 kW)	5HP (4.0 kW)
600V _{PEAK}								3HP (2.2 kW)	7.5HP (5.5 kW)
ZERO CROSS								Random Switching	

Specification :

- (1)Category:DC/AC,Single SSR , 3Phase Reversing , 3 Phase 3 Line , 3 Phase 2 Line
- (2)SIP Typel : Apply to PCB welding
- (3)PANEL MOUNT Type: Apply two screw to fix
- (4)I/O Module Type:Apply many kind of I/O to control
- (5)High-Tension:Load Voltage can to 480VAC , 1200Vpeak
- (6)Electricity : Max Load current to 125A
- (7)3 Phase SSR:To control 3 Phase Motor & Temperature , Load Voltage to 480VAC

Outline Dimensions (unit:mm) :

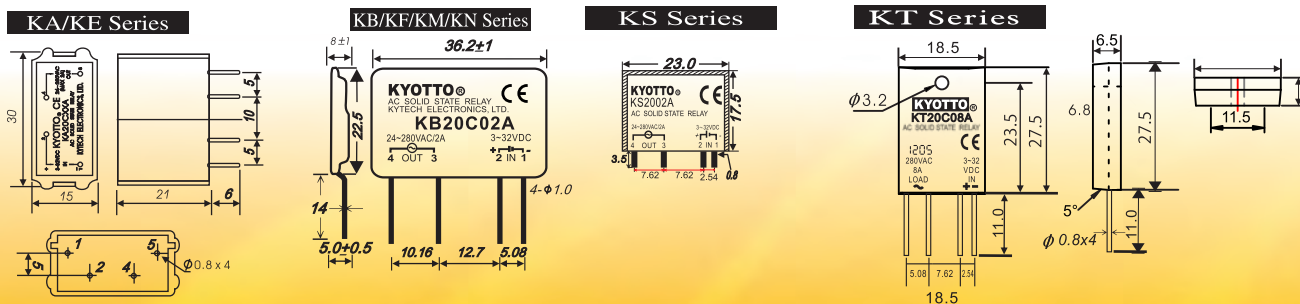

Outline Dimensions (unit:mm) :

