



# 固態繼電器 SOLID STATE RELAY

## KS0602D

### KS06 Series (DC-DC)

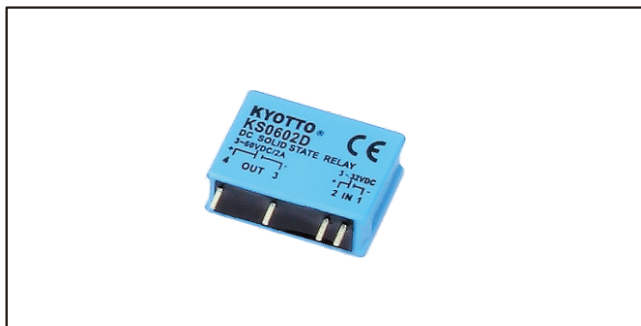

型號索引說明 Model No. Descriptions:

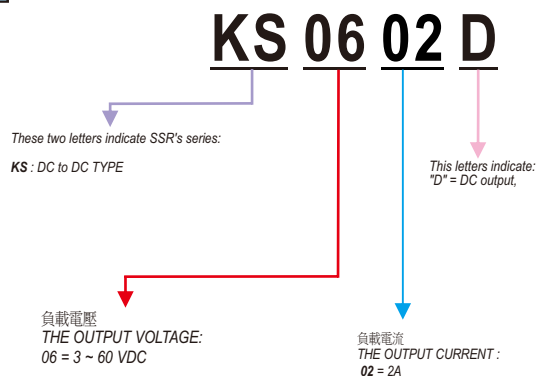

## 產品摘錄 PRODUCT SELECTON

### 輸出規格 OUTPUT SPECIFICATIONS

品名	Description	KS0602D
負載電壓範圍	Operating Voltage [VDC]	3-60VDC
最大負載電流	Maximum Load Current [Adc]	2A
破壞電壓	Maximum Transient Overvoltage [Vpk]	80
洩露電流	Maximum Off-State Leakage Current @Rated Voltage [mA]	Less 3mA
最大瞬間承受電流	Maximum Surge Current [Adc] (10ms)	3.5A
動作壓降	Maximum On-State Voltage Drop @ Rated Current [VDCrms]	1.5
瞬間電壓變化率	Maximum Off-State dV/dt [V/uSEC]	200

### 輸入規格 INPUT SPECIFICATIONS

品名	Description	KS0602D
控制電壓範圍	Control Voltage Range	3-32VDC
最小導通電壓	Must Turn-on Voltage	3.0
最大關斷電壓	Must Turn-off Voltage	1.0
輸入電流	Typical Input Current	15mA
最大動作時間	Maximum Turn-on Time [mSec]	Less 2m Sec
最大關斷時間	Maximum Turn-off Time [mSec]	Less 2m Sec


### 一般規格 GENERAL SPECIFICATIONS

品名	Description	KS0602D
輸入/輸出至外殼絕緣電壓	Dielectric Strength , Input-Output Base (50/60Hz)	-
輸入/輸出絕緣電壓	Dielectric Strength , Input-Output (50/60Hz)	2500
絕緣電阻	Minimum Insulation Resistance	10 <sup>8</sup> ohm
輸入-輸出容抗	Maximum Capacitance , Input-Output	Less 15pf
工作溫度範圍	Ambient Operating Temperature Range	-20°C~+80°C
儲存溫度範圍	Ambient Storage Temperature Range	-40°C~+100°C
觸發方式	Switching Type	電晶體
重量	Weight (g)	6g

### GENERAL NOTES


- (1) All parameters at 25°C unless otherwise specified
- (2) Dielectric strength and insulation resistance are measured between input and output
- (3) Heat sinking require ,for derating curves see next page.

# 等效電路圖 EQUIVALENT CIRCUIT

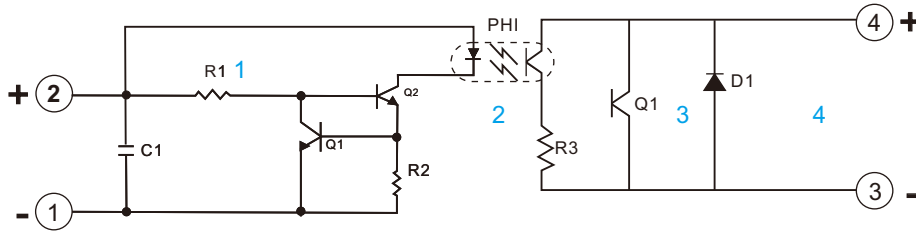

- 1.INPUT CIRCUIT
- 2.PHOTO DETECTOR
- 3.PROTECTED CIRCUIT
- 4.OUTPUT CIRCUIT

# 外觀尺寸圖 MECHANICAL DIMENSIONS (Unit:mm)

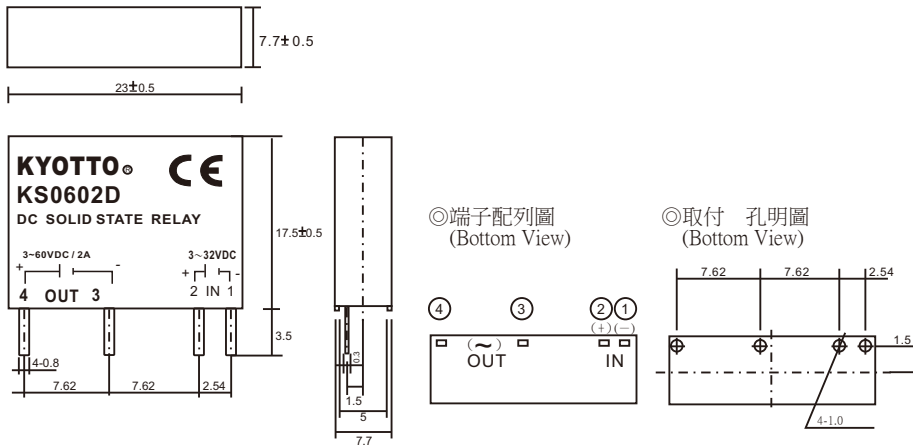

# 特性曲線圖 CHARACTERISTIC CURVES

